



Easy therm 3.5

The Easy therm 3.5 is a powerful stationary microprocessor controlled induction heater with an ergonomic pivoting yoke. To be used for the professional mounting of a range of parts including bearings, typically used in maintenance shops and production areas.

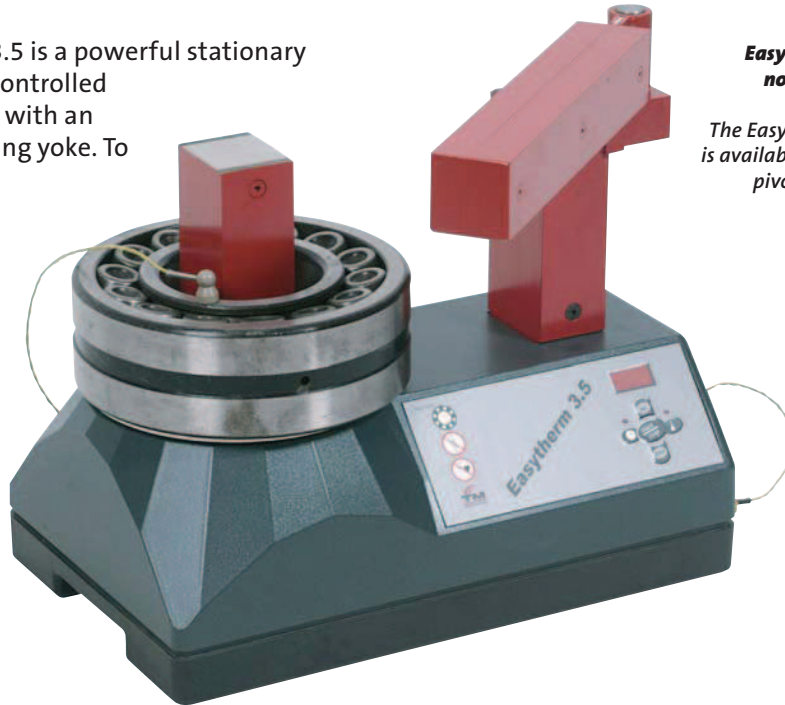

Easy therm 3.5 non pivoting

*The Easy therm 3.5
is available without
pivoting yoke.*



Technical information

Voltage	110-230V
Frequency	50 or 60Hz
Power	3.6kVA
Heater mass	31kg
Dimensions	420x260x360mm
Temp. mode	Max. 240/400°C
Width U-core	180mm
Height U-core	160mm

Dimensions:

Size induction yokes mm	Standard min. bore part (A)	Standard max. outer diameter part (B)	Standard max. width part (C)	Max. weight part	Max. outside diameter with extension yoke 50x50x120mm	Max. width with extension yoke 50x50x120mm
10x10x280	15mm	330mm	180mm	5kg	570mm	180mm
14x14x280	20mm	345mm	180mm	15kg	585mm	180mm
25x25x280	35mm	355mm	180mm	25kg	595mm	180mm
40x40x280	60mm	360mm	180mm	40kg	600mm	180mm
50x50x280	70mm	410mm	180mm	35/70kg	600mm	180mm

**Standard delivered within induction heater.*